arXiv:1304.1998v1 [math.OC] 7 Apr 2013

Convex conditions for robust stability analysis and stabilization of linear aperiodic impulsive and sampled-data systems under dwell-time constraints

Corentin Briat

Swiss Federal Institute of Technology–Zürich (ETH-Z), Department of Biosystems Science and Engineering (D-BSSE), Switzerland.

Abstract

Stability analysis and control of linear impulsive systems is addressed in a hybrid framework, through the use of continuous-time time-varying discontinuous Lyapunov functions. Necessary and sufficient conditions for stability of impulsive systems with periodic impulses are first provided in order to set up the main ideas. Extensions to stability of aperiodic systems under minimum, maximum and ranged dwell-times are then derived. By exploiting further the particular structure of the stability conditions, the results are non-conservatively extended to quadratic stability analysis of linear uncertain impulsive systems. These stability criteria are, in turn, losslessly extended to stabilization using a particular, yet broad enough, class of state-feedback controllers, providing then a convex solution to the open problem of robust dwell-time stabilization of impulsive systems using hybrid stability criteria. Relying finally on the representability of sampled-data systems as impulsive systems, the problems of robust stability analysis and robust stabilization of periodic and aperiodic uncertain sampled-data systems are straightforwardly solved using the same ideas. Several examples are discussed in order to show the effectiveness and reduced complexity of the proposed approach.

Key words: Impulsive systems; sampled-data systems; uncertain systems; stability; stabilization; discontinuous Lyapunov functions

---

1 Introduction

Impulsive systems [3, 69, 15, 16, 36, 45, 32, 8, 9] are an important class of hybrid systems exhibiting both continuous- and discrete-time dynamics. The discrete-time part, which is only active at certain time instants t_k, $k \in \mathbb{N}$, introduces discontinuities in the overall trajectories of the system. They arise in several fields such as epidemiology [62, 12], sampled-data and networked control systems [65, 61, 25, 48, 2, 18], reset systems [49, 4, 50], forestry [67], power electronics [44], harvesting problems [70, 41], impact systems [14], etc. Analyzing them usually relies on the use of Lyapunov functions and input-to-state stability/nonlinear small-gain ideas [36, 50, 24, 23], Lyapunov functionals [48] or, more recently, another type of functionals, verifying certain boundary conditions, referred to as *looped-functionals* [8, 9, 11]. When the impulses occur periodically, the system can be viewed as an LTI discrete-time system which can be studied using discrete-time Lyapunov theory. When impulses arrive at irregular times (aperiodic regime), the discrete-time system becomes time-varying and specific stability concepts should then be considered. The notion of *dwell-time*, i.e. the time between two successive discrete events defined as $T_k := t_{k+1} - t_k$, has been introduced early in the literature [47, 34] and has been proven to be very useful for the analysis of switched systems. In the case of impulsive systems, dwell-times more specifically correspond to the times between two consecutive impulses. Impulsive systems can therefore be classified in terms of the properties of the considered sequence of impulse instants $\{t_k\}$, and a relevant stability notion can be defined for that specific class of sequence of impulse times. When the

---

Email address: `briatc@bsse.ethz.ch,corentin@briat.info` (Corentin Briat).
URL: `http://www.briat.info` (Corentin Briat).

sequence of impulsive instants is arbitrary, i.e. $T_k > 0$, we talk about stability under arbitrary dwell-time, whereas stability under ranged dwell-time is defined for sequences verifying $T_k \in [T_{min}, T_{max}]$. Stability under minimum and maximum dwell-time address the cases $T_k \geq \bar{T}$ and $T_k \leq \bar{T}$, respectively.

Stability under dwell-time constraints can be analyzed in several different ways. Lyapunov approaches based on a separate worst-case convergence analysis (i.e. α-stability) of the distinct parts of the impulsive system [34, 36] are very convenient to work with when dealing with uncertainties, or when control design is the main goal, principally due to their convexity properties. They have, however, been shown to be unable to characterize stability under ranged dwell-time, see e.g. Example 3 of [8] or to yield very accurate estimates for dwell-times [31, 11] since they may not capture the possible interplay between the continuous- and discrete-parts. Discrete-time approaches, however, exhibit much less conservatism, but are, in the present state-of-the-art, difficult to adapt to uncertain systems and aperiodic systems or to extend to control design, mainly due to a lack of convexity. Hybrid stability conditions (also referred to as “mixed stability conditions” in the following) consisting of coupled continuous-time and discrete-time criteria have been shown to yield more accurate estimates for minimum dwell-time for both linear switched systems [31, 21] and linear impulsive systems [8, 10]. Considering such mixed conditions is, moreover, strengthened by the fact that the considered type of Lyapunov functions and type of conditions are simple instances of a general converse Lyapunov result proved in [68] in the context of linear switched systems. The main difficulties in using hybrid conditions lie in the nonconvex dependence on the system matrices (due to the presence of a discrete-time condition), leading then to a difficult extension to both time-invariant and time-varying uncertain systems, and to control design. Looped-functionals [8, 9, 11], which allow to convert discrete-time conditions into convex conditions, have made possible the extension of these mixed conditions to uncertain and aperiodic impulsive systems in a quite simple way, yet not computationally cheap. The problem of designing robust control laws with prescribed dwell-time using mixed stability conditions remains, however, a challenging and open problem.

Periodic and aperiodic sampled-data systems, arising for instance in digital control [17] or networked control systems [72, 35, 71], are intimately connected to impulsive systems since any sampled-data system can be equivalently represented as an impulsive system. Several approaches have been developed to analyze sampled-data systems: discrete-time approaches [64, 28, 52, 37**? ?**], input-delay approaches [66, 27, 58, 26, 43, 42], robust analysis techniques [46, 29, 39], impulsive/hybrid systems formulation [65, 61, 25, 48, 22, 18, 8, 9, 10], and the use of looped-functionals either considering directly the sampled-data system formulation [7, 59] or the impulsive system formulation [8, 9, 10]. As in the case of impulsive systems, the aforementioned approaches have both benefits and drawbacks. Indeed, while functionals or continuous-time robust techniques are suitable for robust analysis thanks to the linear or convex dependence on the system matrices, they are, unfortunately, not very adapted to control design due to an increased number of decision matrices leading to cumbersome bilinear (nonconvex) terms in the design conditions; see e.g. [27, 48, 42, 8, 10]. Discrete-time approaches are, however, very well-suited for control design thanks to the presence of a single decision variable, i.e. the Lyapunov matrix, but may fail to yield tractable criteria when parametric uncertainties enter the picture, mainly due to the presence of exponential terms in the stability conditions; see e.g. [53]. These exponential conditions are also limited to LTI sampled-data systems.

The rationale for using mixed stability criteria for analyzing switched and impulsive systems [31, 21, 8, 10, 11] lies in the reduced (possibly vanishing) conservatism [68] of the conditions, opposed to continuous-time results based on rates of convergence of Lyapunov functions, see e.g. [47, 34, 36]. Hybrid stability criteria are therefore important to consider in order guarantee accuracy, but should be characterized in such a way that *robustness analysis and control design remain possible.* A first step towards such a result has been made very recently by using looped-functionals [8, 10, 11], a specific type of functionals that encode a discrete-time condition as a convex condition in the system matrices, a very suitable feature for robust stability analysis. However, the structure of the conditions prevents the derivation of tractable design criteria due to the presence of multiple decision matrices, inexorably leading to high computational cost and nonconvex terms in the synthesis conditions. The proposed approach, based on time-varying continuous-time discontinuous Lyapunov functions, combines features of the continuous-time and hybrid approaches, by leading to necessary and sufficient stability and stabilization conditions which are convex in the system matrices and in the decision variables (Lyapunov and controller variables), together with a lower complexity than by using looped-functionals.

The contribution of this paper is therefore manifold. First of all, a necessary and sufficient condition for stability of impulsive systems with periodic impulses are derived in Section 2 from the use of a specific discontinuous Lyapunov function. The advantage of the use of such Lyapunov functions lies in a reduced computational complexity over the use of looped-functional, while accuracy is mostly preserved. The periodic case is then extended to cope with aperiodicity in impulse arrival times (i.e. minimum, maximum, and ranged dwell-times) and time-varying parametric uncertainties. Necessary and sufficient results for discrete-time quadratic stability are provided, still with a reduced computational complexity. By relying on non-conservative algebraic manipulations, these results are, further, exactly adapted in Section 3 to quadratic (robust) stabilization using a particular class of state-feedback controllers. These stabilization results provide solutions to the impulsive system counterpart of the open problem of stabilizing linear switched systems with prescribed/optimized minimum dwell-time; [31, penultimate paragraph, page 1916]. More concisely, quadratic stabilization with prescribed minimum, maximum or ranged dwell-times can be expressed as convex optimization problems. The approach is fully generic and can be applied to any linear impulsive system. Exploiting finally, in Section 4, the representability of sampled-data systems as impulsive systems, the results are then adapted to sampled-data systems. Convex necessary and sufficient conditions for quadratic stabilization of periodic and aperiodic uncertain sampled-data systems are obtained. Examples and comparisons with several existing results are discussed in the related sections.

Notations: The set of $n \times n$ (positive definite) symmetric matrices is denoted by $(\mathbb{S}^n_{\succ 0})$ $\mathbb{S}^n$. Given two symmetric matrices A, B, the inequality $A \succ (\succeq) B$ means that $A - B$ is positive (semi)definite. Given a square real matrix A, the notation $\mathrm{Sym}(A)$ stands for the sum $A + A^T$.

2 Stability analysis of periodic and aperiodic impulsive systems

In the same vein as looped-functionals, the proposed approach is a hybrid approach yielding stability conditions convex in the system matrices. This allows us to take advantage of the structure of continuous-time criteria while benefiting of the accuracy of discrete-time criteria, as emphasized in past works such as [8, 9, 10]. To develop further the approach, let us consider linear impulsive systems of the form

$$\begin{aligned} \dot{x}(t) &= Ax(t),\ t \neq t_k \\ x(t) &= Jx^-(t),\ t = t_k \end{aligned} \tag{1}$$

where $x \in \mathbb{R}^n$ is the state of the system and $x^-(t_k)$ stands for the left-limit of $x(s)$ at $s = t_k$, i.e. $x^-(t_k) = \lim_{s \uparrow t_k} x(s)$. The system matrices A and J may be uncertain time-varying, this will be explicitly mentioned when this is the case. The sequence of impulse instants $\{t_k\}_{k \in \mathbb{N}}$, $t_k > 0$, is assumed to have positive increments $T_k := t_{k+1} - t_k > \epsilon > 0$ that are bounded away from 0. Defined as such, the sequence $\{t_k\}_{k \in \mathbb{N}}$ does not admit any accumulation point (we exclude then any Zeno motion) and grows unbounded. Note that the sequence of impulse instants may or may not depend on the state of the system. In the following, we will make no distinction between these two cases since impulse sequences will be solely characterized in terms of dwell-time constraints.

We derive first necessary and sufficient conditions for stability of impulsive systems with periodic impulses which will serve as a groundwork for more advanced results on aperiodic impulsive systems with minimum, maximum and ranged dwell-times. These latter results are then finally extended to uncertain systems. Only the result on periodic impulsive systems is generalized to uncertain systems, all the others straightforwardly follow from the same lines.

2.1 Impulsive systems with periodic impulses

At first sight, the case of periodic impulsive systems, i.e. $T_k = \bar{T}$, $k \in \mathbb{N}$, is of lesser interest since necessary and sufficient conditions for characterizing their stability already exist. The periodic case is, however, much more interesting than we may think, and this, for two reasons. First of all, this result allows us to present the main ideas in a simple and clear manner, easily generalizable to more elaborated cases such as time-varying impulsive systems. Second, the periodic result will turn out to be directly involved in aperiodic stability analysis under minimum and maximum dwell-times.

Theorem 2.1 (Impulsive systems with periodic impulses) *Let us consider the system* (1) *with periodic impulses, i.e.* $T_k = \bar{T}$, $k \in \mathbb{N}$. *Then, the following statements are equivalent:*

(a) The impulsive system (1) with $\bar{T}$*-periodic impulses is asymptotically stable.*
(b) The discrete-time transition matrix $\Psi(\bar{T}) := e^{A\bar{T}}J$ *is Schur*[1] *.*

---

[1] A matrix is Schur (or Schur stable) if all its eigenvalues lie in the unit disc.

(c) There exists a matrix $P \in \mathbb{S}^n_{\succ 0}$ *such that the LMI*

$$J^T e^{A^T \bar{T}} P e^{A\bar{T}} J - P \prec 0 \tag{2}$$

holds or, equivalently, the quadratic form $V(x) = x^T P x$ *is a discrete-time Lyapunov function for the LTI discrete-time system* $z_{k+1} = e^{A\bar{T}} J z_k$.

(d) There exist a differentiable matrix function $R : [0, \bar{T}] \mapsto \mathbb{S}^n$, $R(0) \succ 0$, *and a scalar* $\varepsilon > 0$ *such that the LMIs*

$$A^T R(\tau) + R(\tau)A + \dot{R}(\tau) \preceq 0 \tag{3}$$

and

$$J^T R(0) J - R(\bar{T}) + \varepsilon I \preceq 0 \tag{4}$$

hold for all $\tau \in [0, \bar{T}]$.

(e) There exist a differentiable matrix function $S : [0, \bar{T}] \mapsto \mathbb{S}^n$, $S(\bar{T}) \succ 0$, *and a scalar* $\varepsilon > 0$ *such that the LMIs*

$$A^T S(\tau) + S(\tau)A - \dot{S}(\tau) \preceq 0 \tag{5}$$

and

$$J^T S(\bar{T}) J - S(0) + \varepsilon I \preceq 0 \tag{6}$$

hold for all $\tau \in [0, \bar{T}]$.

Proof : **Proof of (a) ⇔ (b) ⇔ (c):** The equivalence between these statements is well-known and thus only sketched here. Since, the impulsive system is periodic then we can discretize the dynamics to get the equivalent discrete-time system $x(t_{k+1}) = e^{A\bar{T}} J x(t_k)$. The system (1) with $\bar{T}$-periodic impulses is therefore asymptotically stable if and only if $e^{A\bar{T}} J$ is Schur. This is also equivalent to the existence of a quadratic Lyapunov function $V(x) = x^T P x$ that is pointwise decreasing along the trajectories of the discrete-time systems above. The proof is complete.

Proof of (d) ⇒ (c): Assume (d) holds. Integrating (3) over $[0, \bar{T}]$ implies that the LMIs

$$e^{A^T \bar{T}} R(\bar{T}) e^{A\bar{T}} - R(0) \preceq 0 \tag{7}$$

and

$$J^T e^{A^T \bar{T}} R(\bar{T}) e^{A\bar{T}} J - J^T R(0) J \preceq 0 \tag{8}$$

hold. From (4), we have that $R(\bar{T}) \succ 0$ and $J^T R(0) J \preceq R(\bar{T}) - \varepsilon I$. Substituting then $J^T R(0) J$ in (8) yields

$$J^T e^{A^T \bar{T}} R(\bar{T}) e^{A\bar{T}} J - R(\bar{T}) \preceq -\varepsilon I \tag{9}$$

which therefore implies that (2) holds with $P = R(\bar{T}) \succ 0$. The proof is complete.

Proof of (c) ⇒ (d): The proof is structured as follows: first, we prove that (3) admits solutions regardless of the stability of the system, showing that this condition can be assumed to be satisfied without loss of generality. The second part of the proof consists of combining statement (c) with the solution set of (3) to prove that (4) holds.

Assume (2) holds with $P = R(\bar{T}) \succ 0$ and some $Y \succ 0$ as

$$J^T e^{A^T \bar{T}} R(\bar{T}) e^{A\bar{T}} J - R(\bar{T}) = -Y. \tag{10}$$

Since $e^{A\bar{T}} J$ is Schur, then the above matrix equation admits the unique solution [30]

$$R(\bar{T}) = \sum_{i=0}^{\infty} \left(J^T e^{A^T \bar{T}} \right)^i Y \left(e^{A\bar{T}} J \right)^i \succ 0. \tag{11}$$

The set of all solutions $R(\tau)$ to (3) can be defined as the set of solutions of the matrix equality

$$A^T R(\tau) + R(\tau)A + \dot{R}(\tau) = -W(\tau),\ W(\tau) \succeq 0 \tag{12}$$

where $W(\tau)$ is a continuous function w.l.o.g. Given $W(\tau)$, the unique solution to (12) is given by

$$R(\tau) = e^{-A^T\tau}R(0)e^{-A\tau} - \int_0^\tau e^{-A^T(\tau-s)}W(s)e^{-A(\tau-s)}\mathrm{d}s,\ \tau \in [0,\bar{T}] \tag{13}$$

where $R(\bar{T}) \succ 0$ obeys (11). We have proved that (12) can be considered as fulfilled, independently of the stability of the system, which concludes the first part of the proof. The second part of the proof consists of deriving first, from expression (13), the equation

$$e^{A^T\bar{T}}R(\bar{T})e^{A\bar{T}} = -\tilde{W}(\bar{T}) + R(0) \tag{14}$$

where $\tilde{W}(\bar{T}) = \int_0^{\bar{T}} e^{A^Ts}W(s)e^{As}\mathrm{d}s \succeq 0$. The above equality implies that $R(0) \succ \tilde{W}(\bar{T}) \succeq 0$ since $R(\bar{T}) \succ 0$. Consequently, we have that $R(\tau) \succ 0$ for all $\tau \in [0,\bar{T}]$ since $\tilde{W}(\tau) \succeq 0$ is a nondecreasing function, i.e. $\tilde{W}(\tau) \preceq \tilde{W}(\zeta)$ for any $0 \le \tau \le \zeta \le \bar{T}$.

Substituting, finally, the left-hand side of (14) in (10), we get that

$$J^TR(0)J - R(\bar{T}) = -Y + J^T\tilde{W}(\bar{T})J. \tag{15}$$

Since $W(s)$ and $Y \succ 0$ are arbitrary, then we can choose them such that this then implies that $-Y + J^T\tilde{W}(\bar{T})J \prec 0$ and thus that (4) holds. The proof is complete.

Proof of (d) ⇔ (e): Assume (d) holds for some $R(\tau)$, it is immediate to see that $R(\tau) := S(\bar{T}-\tau)$ solves (5) and (6). Reverting the argument proves the equivalence. ♢

The conditions stated in statement (d) can be understood as a non-increase condition, over each interval $[t_k, t_{k+1})$, of the time-varying discontinuous Lyapunov function

$$V_d(x,\tau) = x^T\hat{Q}(\tau)x \tag{16}$$

where $\hat{Q}(t_k+\tau) = Q(\tau)$, $Q(\tau) \in \mathbb{S}^n$, $\tau \in [0,T_k)$, $Q(0) \succ 0$, Q differentiable, and that verifies the boundary condition

$$J^TQ(0)J - Q^-(\bar{T}) + \varepsilon I \preceq 0 \tag{17}$$

where $Q^-(\bar{T}) = \lim\limits_{s\uparrow\bar{T}}\{Q(s)\}$.

A peculiarity of the proposed approach is that the matrices $R(\tau)$ and $S(\tau)$ do not need to be imposed to be positive definite over their domain of definition. Positivity over their domain is directly implied from the positivity of $R(0)$ and $S(\bar{T})$, and the LMI conditions in statements (d) and (e). These conditions, all together, indeed imply that $R(\bar{T})$ is also positive definite, and thus that, by virtue of equation (13) that $R(\tau)$ is positive definite on its domain. The case of $S(\tau)$ is symmetric.

There are several advantages of the conditions (3)-(4) of statement (d) (or conditions (5)-(6) of statement (e)) over condition (2) of statement (c). First of all, the conditions are convex in the system matrices A and J, allowing then for an immediate extension to the uncertain case. Further, the presence of a single decision matrix variable in the conditions tends to suggest the possibility of deriving tractable synthesis conditions. The compensation for these interesting convexity properties is the consideration of infinite dimensional feasibility problems, which may be very hard to solve. Several methods can be applied to make the feasibility problems finite-dimensional. The first one is to discretize the interval $[0,\bar{T}]$ and express the matrix $R(\tau)$ as a piecewise linear function on each subintervals; see e.g. [33, 1]. The second one relies on recent polynomial programming techniques [19], such as sum of squares programming [54], which provide an efficient framework for solving such problems by restricting the matrix functions $R(\tau)$ and

$S(\tau)$ to polynomial matrix functions. The package SOSTOOLS [55] together with the semidefinite programming solver SeDuMi [63] supply the necessary material for solving such problems. The SOS program corresponding to statement (d) is expressed as follows

$$\begin{array}{rl}\text{Find polynomials} & R(\tau), M(\tau) \in \mathbb{S}^n \text{ and } \varepsilon > 0 \\ \text{such that} & M(\tau) \text{ is SOS} \\ & -A^T R(\tau) - R(\tau)A - \dot{R}(\tau) - M(\tau)\tau(\bar{T}-\tau) \text{ is SOS} \\ & R(0) \succ 0 \\ & J^T R(0) J - R(\bar{T}) + \varepsilon I \preceq 0.\end{array} \tag{18}$$

The role of the SOS polynomial variable M is to incorporate the fact that the LMI (3) must be verified for all $\tau \in [0, \bar{T}] = \left\{s \in \mathbb{R} : s(\bar{T}-s) \geq 0\right\}$. This constraint incorporation can be justified using Putinar's Positivstellensatz [56]. It is also very important to point out that the computation complexity is improved by the fact that $R(\tau)$ does not have to be specifically imposed to be positive definite over $[0, \bar{T}]$. This constraint would indeed require the use of another SOS variable $M_2(\tau)$ in order to state the condition that $R(\tau) - \varepsilon I - M_2(\tau)\tau(\bar{T}-\tau)$ is SOS. This unnecessary complexity increase is circumvented by simply imposing $R(0)$ as positive definite.

Still in a computational perspective, it seems necessary to compare the computational complexity of the conditions of Theorem 2.1 to the complexity of the looped-functional-based results of [10] addressing the same problem. Assuming polynomial matrices $R(\tau) \in \mathbb{S}^n$ (or $S(\tau) \in \mathbb{S}^n$) of degree d_R in Theorem 2.1 and a polynomial matrix $Z(\tau) \in \mathbb{S}^{3n}$ of degree d_Z in [10], we have the following count of the number of variables:

$$N_{current}(d_R) = (d_R + 1)\frac{n(n+1)}{2} \text{ and } N_{looped}(d_Z) = \frac{n(n+1)}{2} + (d_Z + 1)\frac{3n(3n+1)}{2} \tag{19}$$

for the current approach and the looped-functional approach of [10], respectively. We can immediately see that the number of variables for the looped-functional approach grows much faster with the system dimension n and the degree of the polynomial than with the proposed approach. It seems, however, important to stress that the expressions (19) should be understood as lower bounds on the actual computational complexity since additional variables are usually needed, e.g. to incorporate constraints. It will be illustrated in the examples that the proposed approach is able to obtain results that are very close to those obtained using looped-functionals with a much lower computational complexity, even if d_R is usually larger than d_Z. A comparison will also be made with a discretization-based approach.

2.2 Aperiodic impulsive systems

Let us consider now that the system (1) is aperiodic, i.e. impulses arrive at irregular times. To this aim, we consider a ranged-dwell time constraint on the sequence of impulse instants, i.e. $T_k \in [T_{min}, T_{max}]$. We then have the following generalization of Theorem 2.1:

Theorem 2.2 (Ranged dwell-time) *Let us consider the system* (1) *with a ranged dwell-time constraint, i.e.* $T_k \in [T_{min}, T_{max}]$, $k \in \mathbb{N}$. *Then, the following statements are equivalent:*

(a) There exists a matrix $P \in \mathbb{S}^n_{\succ 0}$ *such that the LMI*

$$J^T e^{A^T\theta} P e^{A\theta} J - P \prec 0 \tag{20}$$

holds for all $\theta \in [T_{min}, T_{max}]$.

(b) There exist a differentiable matrix function $R : [0, T_{max}] \mapsto \mathbb{S}^n$, $R(0) \succ 0$, *and a scalar* $\varepsilon > 0$ *such that the LMIs*

$$A^T R(\tau) + R(\tau)A + \dot{R}(\tau) \preceq 0 \tag{21}$$

and

$$J^T R(0) J - R(\theta) + \varepsilon I \preceq 0 \tag{22}$$

hold for all $\tau \in [0, T_{max}]$ *and all* $\theta \in [T_{min}, T_{max}]$.

Moreover, when one of the above statements holds, then the aperiodic impulsive system (1) *with ranged dwell-time* $T_k \in [T_{min}, T_{max}]$ *is asymptotically stable.*

Proof : The proof follows the same lines as the one of Theorem 2.1 ♢
It is important to stress that, in the result above, the computational complexity of the second statement is much lower than if we had used conditions (3)-(4) of Theorem 2.1, statement (e). This follows from the fact that in statement (e), we would have required $S(\theta) \succ 0$ for all $\theta \in [0, T_{max}]$, which is obviously much more complex than simply imposing $R(0) \succ 0$ in the present case. To pursue on the computational complexity analysis, we note that the conditions of Theorem 2.2 are more expensive than those of Theorem 2.1 due to the presence of the additional parameter $\theta \in [0, T_{max}]$ in LMI (22).

The next result concerns stability of impulsive system under minimum dwell-time, i.e. $T_k \geq \bar{T}$ for all $k \in \mathbb{N}$. This stability concept has been extensively studied in the past, see. e.g. [36, 8, 10, 9] and references therein.

Theorem 2.3 (Minimum Dwell-Time) *Let us consider the system* (1) *with a minimum dwell-time constraint, i.e.* $T_k \geq \bar{T}$, $k \in \mathbb{N}$. *Then, the following statements are equivalent:*

(a) *There exists a matrix* $P \in \mathbb{S}^n_{\succ 0}$ *such that the LMIs*

$$A^T P + PA \prec 0 \tag{23}$$

and

$$J^T e^{A^T\theta} P e^{A\theta} J - P \prec 0 \tag{24}$$

hold for all $\theta \in [\bar{T}, \infty)$.

(b) *There exists a matrix* $P \in \mathbb{S}^n_{\succ 0}$ *such that the LMIs*

$$A^T P + PA \prec 0 \tag{25}$$

and

$$J^T e^{A^T\bar{T}} P e^{A\bar{T}} J - P \prec 0 \tag{26}$$

hold.

(c) *There exist a differentiable matrix function* $R : [0, \bar{T}] \mapsto \mathbb{S}^n$, $R(0) \succ 0$, *and a scalar* $\varepsilon > 0$ *such that the LMIs*

$$A^T R(0) + R(0)A \prec 0 \tag{27}$$

$$A^T R(\tau) + R(\tau)A + \dot{R}(\tau) \preceq 0 \tag{28}$$

and

$$J^T R(0) J - R(\bar{T}) + \varepsilon I \preceq 0 \tag{29}$$

hold for all $\tau \in [0, \bar{T}]$.

(d) *There exist a differentiable matrix function* $S : [0, \bar{T}] \mapsto \mathbb{S}^n$, $S(\bar{T}) \succ 0$, *and a scalar* $\varepsilon > 0$ *such that the LMIs*

$$A^T S(\bar{T}) + S(\bar{T})A \prec 0 \tag{30}$$

$$A^T S(\tau) + S(\tau)A - \dot{S}(\tau) \preceq 0 \tag{31}$$

and

$$J^T S(\bar{T}) J - S(0) + \varepsilon I \preceq 0 \tag{32}$$

hold for all $\tau \in [0, \bar{T}]$.

Moreover, when one of the above statements holds, the impulsive system (1) *is asymptotically stable under minimum dwell-time* $\bar{T}$, *i.e. for any sequence* $\{t_k\}_{k\in\mathbb{N}}$ *such that* $T_k \geq \bar{T}$.

Proof : **Proof of** $(b) \Leftrightarrow (c) \Leftrightarrow (d)$**:** It follows from Theorem 2.1.

Proof of $(a) \Rightarrow (b)$**:** Immediate.

Proof of $(b) \Rightarrow (a)$**:** This has been proved in [8, 10], this is recalled for completeness. The key idea is to prove that (25) and (26) together imply that (24) holds for all $\tau \in [\bar{T}, \infty)$. Let $\mathcal{L}(\theta) := e^{A^T\theta}Pe^{A\theta}$, then (24) holds for all $\theta \in [\bar{T}, \infty)$ if and only if $J^T\mathcal{L}(\theta)J - P \prec 0$ holds for all $\theta \in [\bar{T}, \infty)$. A Taylor expansion around $\theta = \theta_0 \geq \bar{T}$ yields

$$\mathcal{L}(\theta_0 + \delta) - \mathcal{L}(\theta_0) = \delta e^{A^T\theta_0}[A^TP + PA]e^{A\theta_0} + o(\delta). \tag{33}$$

Since (25) holds, then the right-hand side is negative definite for all $\theta_0 \geq \bar{T}$ and all $\delta > 0$, thus we have that $\mathcal{L}(\bar{T} + \epsilon) \preceq \mathcal{L}(\bar{T})$ for all $\epsilon \geq 0$. Therefore, $J^T\mathcal{L}(\bar{T})J - P \prec 0$ implies that $J^T\mathcal{L}(\theta)J - P \prec 0$ holds for all $\theta \geq \bar{T}$, which concludes the proof. ♢

It is important tot note that the above theorem straightforwardly extends to time-varying systems depending explicitly on time and/or time-varying parameters by simply using the fundamental-solution and the state-transition matrices instead of exponentials. The variational argument to prove the equivalence between statements (a) and (b) remains also valid.

Remark 1 *Similarly to as in [8, 10], a maximum dwell-time result can be obtained by simply reverting the inequality sign in LMIs* (23) , (25), (27) *and* (30)*. In such a case, the concluding statement changes to: "The aperiodic impulsive system* (1) *is asymptotically stable under maximum dwell-time* $\bar{T}$*, i.e. for any sequence* $\{t_k\}_{k\in\mathbb{N}}$ *such that* $T_k \in [\epsilon, \bar{T}]$ *for any* $\epsilon > 0$*."*

2.3 Examples

The conditions stated in Theorems 2.1, 2.2 and 2.3 are infinite-dimensional feasibility problems. In order to enforce them efficiently, the sum-of-squares programming package SOSTOOLS [55] and the semidefinite programming solver SeDuMi [63] are used. Suitable matrix functions R or S such that the conditions of Theorems 2.1, 2.2 and 2.3 are feasible are then searched within the set of matrix polynomials of fixed (and chosen) degree, d_R say. In this case, the matrix function $R(\tau)$ is chosen as $R(\tau) = \sum_{i=0}^{d_R} R_i\tau^i$, $R_i \in \mathbb{S}^n$, and, in this regard, its derivative is simply given by the polynomial $\dot{R}(\tau) = \sum_{i=1}^{d_R} iR_i\tau^{i-1}$ which can be easily inserted in the SOS conditions. In the examples below, the number of variables is identified as the number of variables declared by SOSTOOLS when defining the matrix decision variables, i.e. the Lyapunov matrix $P(\tau)$ and the SOS variables $M_i(\tau)$'s for constraints incorporation.

Example 1 (Ranged dwell-time) *Let us consider the system (1) with matrices [8, 10]*

$$A = \begin{bmatrix} -1 & 0.1 \\ 0 & 1.2 \end{bmatrix}, \quad J = \begin{bmatrix} 1.2 & 0 \\ 0 & 0.5 \end{bmatrix}. \tag{34}$$

By computing the eigenvalues of $e^{A\bar{T}}J$*, this system can be easily shown to be stable with* $\bar{T}$*-periodic impulses whenever* $\bar{T} \in [0.1824, 0.5776]$*. Stability of this system in the aperiodic case cannot be directly addressed using methods based on rates of convergence of Lyapunov functions since both matrices are unstable, see e.g. [36, 8]. Note, however, that this system can be analyzed using methods from [23]. Using the ranged dwell-time stability conditions* (21)-(22) *of Theorem 2.2, the same bounds are retrieved with a matrix polynomial R of order 6, showing then tightness of the obtained numerical values in the aperiodic case. For comparison purposes, the same numerical result is obtained in [10] using a looped-functional of degree* $d_Z = 3$*. SOSTOOLS, however, declares 149 variables for the current approach, whereas for looped-functionals* 2806 *variables are involved. The execution time, on an Intel i7, 2.70 Ghz, 4GB of RAM, including pre- and post-processing is about 1 second whereas it is approximately of 15 seconds for the looped functional approach of [10].*

Example 2 (Minimum dwell-time) *Let us consider the system (1) with matrices [8, 13]*

$$A = \begin{bmatrix} -1 & 0 \\ 1 & -2 \end{bmatrix}, \quad J = \begin{bmatrix} 2 & 1 \\ 1 & 3 \end{bmatrix}. \tag{35}$$

Since A is Hurwitz, the minimum dwell-time result stated in Theorem 2.3 can be applied. Using conditions (25)-(26)*, we get the minimum dwell-time* $\bar{T} = 1.1405$*.The same value for the minimum dwell-time is obtained using*

	order of R	T_{min}	T_{max}
Theorem 2.2, (b)	2	0.1834	0.4998
	4	0.1824	0.5768
	6	0.1824	0.5776
Periodic case	–	0.1824	0.5776

Table 1
Estimates of the admissible range of dwell-times for the aperiodic system of Example 1

	order of R	T_{min}
Theorem 2.3, (c)	2	1.1883
	4	1.1408
	6	1.1406
Theorem 2.3, (b)	–	1.1406
Periodic case	–	1.1406

Table 2
Estimates of the minimum dwell-time for Example 2

conditions (27)-(28)-(29) *with a polynomial matrix R of order 6; see Table 2. Using the looped-functional approach of [10], this numerical result is obtained by using polynomials of degree $d_Z = 3$ (i.e. 412 variables), whereas the current approach involving polynomials of order 6 only requires 85 variables; approximately a five-fold decrease. The execution time, on an Intel i7, 2.70 Ghz, 4GB of RAM, including pre- and post-processing is about 0.5 second whereas it is approximately of 1.5 seconds for the looped functional approach of [10]. For comparison, we also consider a discretization scheme [1] where $R(\tau)$ is expressed as a piecewise linear function on $[0, \bar{T}]$ which is subdivided in N subintervals. For a fair comparison, we select $N = 28$, which gives 87 variables, and we get 1.1919 as the computed bound on the minimum dwell-time. The computation time is 1.2 seconds. Thus we can see that, on this example, the SOS approach perform better with a comparable number of variables. Note, moreover, that the number of constraints involved in the discretization is larger than the one considered in the SOS program as well.*

Example 3 (Maximum dwell-time) *Let us consider the system (1) with matrices [8, 10]*

$$A = \begin{bmatrix} 1 & 3 \\ -1 & 2 \end{bmatrix}, \quad J = \begin{bmatrix} 1/2 & 0 \\ 0 & 1/2 \end{bmatrix}. \tag{36}$$

This system is a candidate for the maximum dwell-time result discussed in Remark 1. Conditions (25)-(26)*, where the inequality sign of* (25) *is reversed, yield the maximum dwell-time $\bar{T} = 0.4620$. Using then conditions* (27)-(28)-(29) *with a sign reversal on* (27)*, we obtain the maximum dwell-time values summarized in Table 3. The value* 0.4620 *is retrieved using a matrix polynomial R of order 6. Once again the computational complexity of the approach is much lower than by using looped-functionals; see Example 2.*

	order of R	T_{max}
Theorem 2.3, (c)	2	0.3999
	4	0.4615
	6	0.4620
Theorem 2.3, (b)	–	0.4620
Periodic case	–	0.4620

Table 3
Estimates of the maximum dwell-time for Example 3 using Theorem 2.3 and Remark 1.

order of R	T_{max}
2	0.1028
4	0.1071
–	0.1072 (gridding)

Table 4
Estimates of the maximum dwell-time for Example 4 using the robustification of Theorem 2.3 (using Theorem 2.4) and Remark 1.

2.4 Robustness results

All the previous results can be robustified to account for parametric uncertainties affecting A and J. To this aim, let us consider now that the matrices of the system (1) are uncertain, possibly time-varying, and belonging to the following polytopes

$$A \in \mathcal{A} := \mathbf{co}\{A_1, \ldots, A_N\} \text{ and } J \in \mathcal{J} := \mathbf{co}\{J_1, \ldots, J_N\} \tag{37}$$

where $\mathbf{co}\{\cdot\}$ is the convex-hull operator. Before stating the main results, it is necessary to introduce the state-transition matrix $\Phi(\cdot)$, which corresponds to system (1)-(37), as

$$\frac{\mathrm{d}\Phi(s)}{\mathrm{d}s} = \left(\sum_{i=1}^{N} \lambda_i(s) A_i\right) \Phi(s), \ \Phi(0) = I \tag{38}$$

where $\lambda(s) \in \Lambda_N := \left\{\xi \in \mathbb{R}^N_{\geq 0} :\ ||\xi||_1 = 1\right\}$ is sufficiently regular so that solutions to (38) are well-defined, e.g. in a Carathéodory sense. Associated to this transition matrix, we define the set $\mathbf{\Phi}_{\bar{T}}$ as

$$\mathbf{\Phi}_{\bar{T}} := \left\{\Phi(\bar{T}) :\ \Phi(s) \text{ solves } (38),\ \lambda(s) \in \Lambda_N,\ s \in [0, \bar{T}]\right\}. \tag{39}$$

This set corresponds of all possible transition matrices $\Phi(\bar{T})$ obtained for all possible trajectories of the uncertain parameters λ. Note that the set $\mathbf{\Phi}_{\bar{T}}$ is strongly nonconvex and is difficult to compute exactly. This intricate structure illustrates the inherent difficulty in considering uncertain systems in a discrete-time setting. By reformulating the discrete-time conditions in terms of conditions (3) and (4), this difficulty is circumvented and discrete-time stability results can be efficiently robustified. For conciseness, only the robustification of Theorem 2.1 will be discussed. Robust versions of Theorems 2.2 and 2.3 can be obtained in the same way.

Theorem 2.4 (Periodic impulses) *Let us consider the uncertain (time-varying) impulsive system* (1)-(37) *with $\bar{T}$-periodic impulses, i.e. $T_k = \bar{T}$, $k \in \mathbb{N}$. Then, the following statements are equivalent:*

(a) *The uncertain (time-varying) impulsive system* (1)-(37) *with $\bar{T}$-periodic impulses is quadratically stable*[2].

(b) *There exists a matrix $P \in \mathbb{S}^n_{\succ 0}$ such that the LMI*

$$J^T \Psi^T P \Psi J - P \prec 0 \tag{40}$$

holds for all $(\Psi, J) \in \mathbf{\Phi}_{\bar{T}} \times \mathcal{J}$. Equivalently, the quadratic form $V(x) = x^T P x$ is a discrete-time Lyapunov function for the uncertain time-varying discrete-time system $z_{k+1} = \Psi_k J z_k$, for all $(\Psi_k, J) \in \mathbf{\Phi}_{\bar{T}} \times \mathcal{J}$.

(c) *There exist a differentiable matrix function $R : [0, \bar{T}] \mapsto \mathbb{S}^n$, $R(0) \succ 0$, and a scalar $\varepsilon > 0$ such that the LMIs*

$$A_i^T R(\tau) + R(\tau) A_i + \dot{R}(\tau) \preceq 0 \tag{41}$$

and

$$J_i^T R(0) J_i - R(\bar{T}) + \varepsilon I \preceq 0 \tag{42}$$

hold for all $\tau \in [0, \bar{T}]$ and all $i = 1, \ldots, N$.

(d) *There exist a differentiable matrix function $S : [0, \bar{T}] \mapsto \mathbb{S}^n$, $S(\bar{T}) \succ 0$, and a scalar $\varepsilon > 0$ such that the LMIs*

$$A_i^T S(\tau) + S(\tau) A_i - \dot{S}(\tau) \preceq 0 \tag{43}$$

and

$$J_i^T S(\bar{T}) J_i - S(0) + \varepsilon I \preceq 0 \tag{44}$$

hold for all $\tau \in [0, \bar{T}]$ and all $i = 1, \ldots, N$.

Proof : Let us introduce the matrices $A(\lambda) = \sum_{i=1}^{N} \lambda_i A_i$ and $J(\zeta) = \sum_{i=1}^{N} \zeta_i J_i$, $\lambda, \zeta \in \Lambda_N$. The proof then simply relies on convexity arguments. Indeed, the LMI

$$A(\lambda(\tau))^T R(\tau) + R(\tau) A(\lambda(\tau)) + \dot{R}(\tau) \preceq 0 \tag{45}$$

holds for all $\lambda(\tau) \in \Lambda_N$ and all $\tau \in [0, \bar{T}]$ if and only if

$$A_i^T R(\tau) + R(\tau) A_i + \dot{R}(\tau) \preceq 0$$

holds for all $\tau \in [0, \bar{T}]$ and all $i = 1, \ldots, N$. Similarly, using the fact that $R(0) \succ 0$, the LMI

$$J(\zeta)^T R(0) J(\zeta) - R(\bar{T}) + \varepsilon I \preceq 0,\ \zeta \in \Lambda_N \tag{46}$$

---

[2] Quadratic stability of a linear uncertain system is defined here through the existence of a common quadratic Lyapunov function (i.e. independent of λ in the present case) for the uncertain system; see e.g. [40].

is convex in ζ, and therefore holds for all $\zeta \in \Lambda_N$ if and only if

$$J_i^T R(0) J_i - R(\bar{T}) + \varepsilon I \preceq 0$$

holds for all $i = 1, \ldots, N$. The rest of the proof follows from the equivalence between (45)-(46) and (40) using the same arguments as for proving Theorem 2.1. Note that the proof of Theorem 2.1 readily extends to the case of time-varying matrices where exponential terms simply have to be replaced by state-transition matrices belonging to $\mathbf{\Phi}_{\bar{T}}$. $\diamondsuit$

Example 4 *Let us consider system* (1)-(37) *with the polytopes [10]*

$$\mathcal{A} = \mathbf{co}\left\{\begin{bmatrix} 1 & 3 \\ -1 & 2 \end{bmatrix}, \begin{bmatrix} 3 & 1 \\ -2 & 4 \end{bmatrix}\right\}, \ \mathcal{J} = \mathbf{co}\left\{\begin{bmatrix} 1/4 & 0 \\ 0 & 2/3 \end{bmatrix}, \begin{bmatrix} 2/3 & 0 \\ 0 & 1/2 \end{bmatrix}\right\}. \tag{47}$$

This system is the uncertain version of the system treated in Example 3. By gridding the conditions (25)-(26) *where the first one has inequality sign reversed, we obtain the optimistic value (upper-bound)* 0.1072 *on the robust maximum dwell-time. Applying, on the other hand, the robust version of the maximum dwell-time result*[3] *, we obtain the results of Table 4 where we can see that the value* 0.1072 *is almost recovered whenever R is chosen as a matrix polynomial of order* 4*. For comparison, the same result is obtained with a looped-functional of degree $d_Z = 2$ in [10]. However, the current approach involves 87 variables, whereas 335 variables are declared by SOSTOOLS for solving the conditions obtained using looped-functionals. The execution time, on an Intel i7, 2.70 Ghz, 4GB of RAM, including pre- and post-processing is about 1 second whereas it is approximately of 4 seconds for the looped functional approach of [10].*

3 Stabilization of periodic and aperiodic impulsive systems

It is now shown that the current framework can be efficiently and accurately used for control design, unlike looped-functionals and several approaches based on Lyapunov functionals. To this aim, let us consider the impulsive system

$$\begin{aligned} \dot{x}(t) &= Ax(t) + B_c u_c(t), \ t \neq t_k \\ x(t) &= Jx^-(t) + B_d u_d(t), \ t = t_k \end{aligned} \tag{48}$$

where $u_c \in \mathbb{R}^{m_c}$ and $u_d \in \mathbb{R}^{m_d}$ are the control inputs. The following class of state-feedback control laws is considered:

$$\begin{aligned} u_c(t_k + \tau) &= K_c(\tau)x(t_k + \tau), \ \tau \in [0, T_k), \ k \in \mathbb{N} \\ u_d(t_k) &= K_d x^-(t_k) \end{aligned} \tag{49}$$

where the continuous control law is time-varying and the discrete one is time-invariant.The purpose of this section is therefore to provide tractable conditions for finding suitable $K_c : [0, \bar{T}) \mapsto \mathbb{R}^{m_c \times n}$ and $K_d \in \mathbb{R}^{m_d \times n}$ such that the closed-loop system (48)-(49) is asymptotically stable.

In the following, exact conditions for nominal stabilization of impulsive systems with periodic impulses and minimum dwell-time are provided. The non-conservativeness of the conditions is strongly related to the considered control law: choosing, for instance, a constant gain for the continuous control law would have resulted in much less tractable conditions, yet possible to handle conservatively using various relaxation techniques. As for stability analysis results, stabilization results on ranged and maximum dwell-times readily follow; they are thus omitted. Extensions to uncertain systems are immediate and omitted as well.

3.1 Periodic impulses case

The following result gives constructive conditions for designing a control law of the form (49) for impulsive systems with $\bar{T}$-periodic impulses, i.e. $T_k = \bar{T}$. Suitable controller gains can, indeed, be directly extracted from the solutions of the sum-of-squares feasibility problems stated in the following result:

---

[3] Not explicitly derived in this paper but consisting of the robustification of Theorem 2.3, and accounting for Remark 1.

Theorem 3.1 (Impulsive systems with periodic impulses) *The following statements are equivalent:*

(a) There exists a control law (49) *such that the impulsive system* (48)-(49) *with $\bar{T}$-periodic impulses is asymptotically stable.*

(b) There exist a differentiable matrix function $R : [0, \bar{T}] \mapsto \mathbb{S}^n$, $R(\bar{T}) \succ 0$, a matrix function $U_c : [0, \bar{T}] \mapsto \mathbb{R}^{m_c \times n}$, a matrix $U_d \in \mathbb{R}^{m_d \times n}$ and a scalar $\varepsilon > 0$ such that the LMIs

$$\operatorname{Sym}[AR(\tau) + B_c U_c(\tau)] - \dot{R}(\tau) \preceq 0 \tag{50}$$

and

$$\begin{bmatrix} -R(0) + \varepsilon I & JR(\bar{T}) + B_d U_d \\ \star & -R(\bar{T}) \end{bmatrix} \preceq 0 \tag{51}$$

hold for all $\tau \in [0, \bar{T}]$. In such a case, suitable matrices for the control-law (49) *are given by the expressions*

$$\begin{aligned} K_c(\tau) &= U_c(\tau) R(\tau)^{-1} \\ K_d &= U_d R(\bar{T})^{-1}. \end{aligned} \tag{52}$$

(c) There exist a differentiable matrix function $S : [0, \bar{T}] \mapsto \mathbb{S}^n$, $S(0) \succ 0$, a matrix function $U_c : [0, \bar{T}] \mapsto \mathbb{R}^{m_c \times n}$, a matrix $U_d \in \mathbb{R}^{m_d \times n}$ and a scalar $\varepsilon > 0$ such that the LMIs

$$\operatorname{Sym}[AS(\tau) + B_c U_c(\tau)] + \dot{S}(\tau) \preceq 0 \tag{53}$$

and

$$\begin{bmatrix} -S(\bar{T}) + \varepsilon I & JS(0) + B_d U_d \\ \star & -S(0) \end{bmatrix} \preceq 0 \tag{54}$$

hold for all $\tau \in [0, \bar{T}]$. In such a case, suitable matrices for the control law (49) *are given by the expressions*

$$\begin{aligned} K_c(\tau) &= U_c(\tau) S(\tau)^{-1} \\ K_d &= U_d S(0)^{-1}. \end{aligned} \tag{55}$$

Proof : What has to be proven is the exactness of the stabilization conditions (53)-(54). By performing a congruence transformation on (53) with respect to $\tilde{S} := S^{-1}$ we get that

$$\operatorname{Sym}\left[\tilde{S}(\tau)(A + B_c K_c(\tau))\right] - \dot{\tilde{S}}(\tau) \preceq 0 \tag{56}$$

where we used the facts that $K_c(\tau) = U_c(\tau)\tilde{S}(\tau)$ and $\tilde{S}(\tau)\dot{S}(\tau)\tilde{S}(\tau) = -\dot{\tilde{S}}(\tau)$. Looking now at the LMI (53), we can easily see that it is equivalent to

$$\begin{bmatrix} I \\ (J + B_d K_d)^T \end{bmatrix}^T \begin{bmatrix} -S(\bar{T}) & 0 \\ 0 & S(0) \end{bmatrix} \begin{bmatrix} I \\ (J + B_d K_d)^T \end{bmatrix} \prec 0. \tag{57}$$

Noting then that the central matrix has n positive and n negative eigenvalues, and that the outer-factors are of rank n, then the dualization lemma [38, 57] applies, and we get the equivalent LMI

$$(J + B_d K_d)^T \tilde{S}(\bar{T})(J + B_d K_d) - \tilde{S}(0) \prec 0 \tag{58}$$

and thus that

$$(J + B_d K_d)^T \tilde{S}(\bar{T})(J + B_d K_d) - \tilde{S}(0) + \varepsilon' I \preceq 0 \tag{59}$$

for some $\varepsilon' > 0$. Noting finally that the conditions (56)-(59) are identical to (5)-(6) proves the result. The equivalence follows from the losslessness of the manipulations. Statement (b) can be proved along the same lines. ♢

Remark 2 *Whenever stabilization with ranged dwell-time is considered, the conditions of statement (b) should be considered in order to get a controller matrix K_d that is independent of T_k since the associated decision variable U_d is coupled to K_d via the matrix $S(0)$. Statement (c) will, on the other hand, lead to a controller matrix K_d that depends on T_k since U_d and K_d are coupled via $S(T_k)$.*

3.2 Stabilization under minimum dwell-time

The stabilization under minimum dwell-time is slightly more complicated since the controller gain $K_c(\tau)$ in (49) must remain bounded as $\tau \to \infty$. In the best case, it should converge to a finite value. A way for solving this difficulty is to consider the following controller gain

$$K_c(\tau) = \begin{cases} \tilde{K}_c(\tau) & \text{if } \tau \in [0, \bar{T}) \\ \tilde{K}_c(\bar{T}) & \text{if } \tau \in [\bar{T}, T_k) \end{cases} \tag{60}$$

where $T_k \geq \bar{T}$, $k \in \mathbb{N}$ and $\tilde{K}_c(\tau)$ is some matrix function to be determined. This specific structure for the control law, as it will be emphasized later, arises naturally from the structure of the minimum dwell-time stability conditions and will be shown to be non-restrictive. Again the matrices of the controller can be extracted from the solutions of the feasibility problem stated in the following result:

Theorem 3.2 (Minimum dwell-time) *The following statements are equivalent:*

(a) There exist matrices $P \in \mathbb{S}^n_{\succ 0}$, $K_d \in \mathbb{R}^{m_d \times n}$ and a matrix function $\tilde{K}_c : [0, \bar{T}] \mapsto \mathbb{R}^{m_c \times n}$ such that the matrix inequalities

$$(A + B_c\tilde{K}_c(\bar{T}))^T P + P(A + B_c\tilde{K}_c(\bar{T})) \prec 0 \tag{61}$$

and

$$(J + B_d K_d)^T \Phi(\bar{T})^T P \Phi(\bar{T})(J + B_d K_d) - P \prec 0 \tag{62}$$

holds where $\Phi : [0, \infty) \mapsto \mathbb{R}^{n \times n}$ is the transition matrix defined as

$$\begin{aligned} \frac{d}{d\tau}\Phi(\tau) &= [A + B_c K_c(\tau)]\Phi(\tau), \ \tau \geq 0 \\ \Phi(0) &= I. \end{aligned} \tag{63}$$

(b) There exist a differentiable matrix function $S : [0, \bar{T}] \mapsto \mathbb{S}^n$, $S(\bar{T}) \succ 0$, a matrix function $U_c : [0, \bar{T}] \mapsto \mathbb{R}^{m_c \times n}$, a matrix $U_d \in \mathbb{R}^{m_d \times n}$ and a scalar $\varepsilon > 0$ such that the LMIs

$$\text{Sym}[AS(\bar{T}) + B_c U_c(\bar{T})] \prec 0, \tag{64}$$

$$\text{Sym}[AS(\tau) + B_c U_c(\tau)] + \dot{S}(\tau) \preceq 0 \tag{65}$$

and

$$\begin{bmatrix} -S(0) + \varepsilon I & JS(\bar{T}) + B_d U_d \\ \star & -S(\bar{T}) \end{bmatrix} \preceq 0 \tag{66}$$

hold for all $\tau \in [0, \bar{T}]$. In this case, suitable controller gains are retrieved using

$$\begin{aligned} \tilde{K}_c(\tau) &= U_c(\tau)S(\tau)^{-1} \\ K_d &= U_d S(\bar{T})^{-1}. \end{aligned} \tag{67}$$

Moreover, in such a case, the closed-loop system (48)-(49)-(60) *is asymptotically stable with minimum dwell-time $\bar{T}$.*

Proof : The first thing that has to be proven is the fact that statement (a) implies that the closed-loop system is stable with minimum dwell-time $\bar{T}$. The equivalence between (a) and (b) follows from Theorem 3.1 and the changes of variables $U_c(\tau) = \tilde{K}_c(\tau)S(\tau)$ and $U_d = K_d S(\bar{T})$. Let us prove then that statement (a) implies that the closed-loop system is stable with minimum dwell-time $\bar{T}$. Two possible scenarios: 1) either impulses always arrive in finite-time, i.e. $\bar{T} \leq T_k < \infty$; or 2) impulses stop at some point.

Case 1): In the first case, we need to show that the Lyapunov function $V(x) = x^TPx$ evaluated at times t_k and along the trajectories of the closed-loop system (48)-(49)-(60) is pointwise decreasing. This is the case whenever the LMI

$$(J + B_dK_d)^T\Phi(\theta)^TP\Phi(\theta)(J + B_dK_d) - P \prec 0 \tag{68}$$

holds for all finite $\theta \in [\bar{T}, \infty)$. By using the fact that $\Phi(\bar{T} + \delta) = e^{(A+B_cK_c(\bar{T}))\delta}\Phi(\bar{T})$ for all $\delta \geq 0$ and the same arguments as in the proof of Theorem 2.3, we have that conditions (61) and (62) implies that (68) holds for all finite $\theta \in [\bar{T}, \infty)$. The convergence of the trajectories of the impulsive system to 0 simply follows from the boundedness and continuity of the function $V(x(t))$ on every interval (t_k, t_{k+1}). This proves case 1).

Case 2): When impulses stop after some time, t_k say, then only the continuous regime is active and the system becomes a standard continuous-time system whose asymptotic stability is governed by the long-term behavior of the continuous-time matrix $A + B_cK_c(\tau)$. Since we have

$$A + B_cK_c(\tau) = \begin{cases} A + B_c\tilde{K}_c(\tau) & \text{if } \tau \in [0, \bar{T}) \\ A + B_c\tilde{K}_c(\bar{T}) & \text{if } \tau \geq \bar{T} \end{cases} \tag{69}$$

then, by virtue of the condition (61), the Lyapunov function $V(x) = x^TPx$ starts decreasing at $t_k + \bar{T}$, the latest, and continuously decreases to 0, implying then asymptotic stability of the system. This proves case 2). $\diamondsuit$

In the above result, we can clearly see that the structure of the control law fits exactly the structure of the conditions, which allows us to obtain lossless results. Without this maintain of the value of $\tilde{K}(\tau)$ to $\tilde{K}(\bar{T})$ for all $\tau \in [\bar{T}, T_k)$, deriving a minimum dwell-time stabilization result would have been much trickier. As a concluding remark on stabilization under minimum dwell-time, we note that the proposed control law just needs to be computed offline and is easy to implement.

Example 5 *Let us consider the system* (48) *with matrices*

$$A = \begin{bmatrix} 1 & 0 \\ 1 & 2 \end{bmatrix},\ B = \begin{bmatrix} 1 \\ 0 \end{bmatrix} \text{ and } J = \begin{bmatrix} 1 & 1 \\ 1 & 3 \end{bmatrix}. \tag{70}$$

Note that this system has both unstable flow and jumps. If we therefore assume that $K_d = 0$, then the system cannot be stabilized for arbitrary dwell-times since the jumps are destabilizing. Thus, we want to compute $\tilde{K}_c(\tau)$ such that the minimum dwell-time is, at most, $\bar{T} = 0.1$. Invoking Theorem 3.2, statement (b), with polynomial matrices $U_c(\tau)$ and $P(\tau)$ of order 1, we find the controller

$$\tilde{K}_c(\tau) = \frac{1}{d(\tau)} \begin{bmatrix} 1.4750481 + 3.2714889\tau - 41.011914\tau^2 \\ 3.9063911 - 1.6733059\tau - 37.472443\tau^2 \end{bmatrix}^T \tag{71}$$

where $d(\tau) = -0.19767438 + 0.78454217\tau + 7.6562219\tau^2$. State-trajectories of the closed-loop system, for some randomly generated impulse-times satisfying the dwell-time constraint, are depicted in Fig. 1. We can clearly see that the controller stabilizes the system. In terms of computational complexity, only 27 variables are defined by SOSTOOLS.

4 Application to aperiodic uncertain sampled-data systems

It is well-known that sampled-data systems can be reformulated as impulsive systems. On the basis of this reformulation, all the results developed in the previous sections therefore apply. It is hence possible to obtain robust stabilization results for aperiodic uncertain sampled-data systems with inter-sampling times in a range, providing then a solution to this challenging problem. In terms of robust stability analysis, the proposed approach is computationally less expensive than those based on looped-functionals; see [10, 60]. Input-delay based methods [27, 42] are less expensive but less accurate as well, and cannot be efficiently used for control without drastic simplifications.

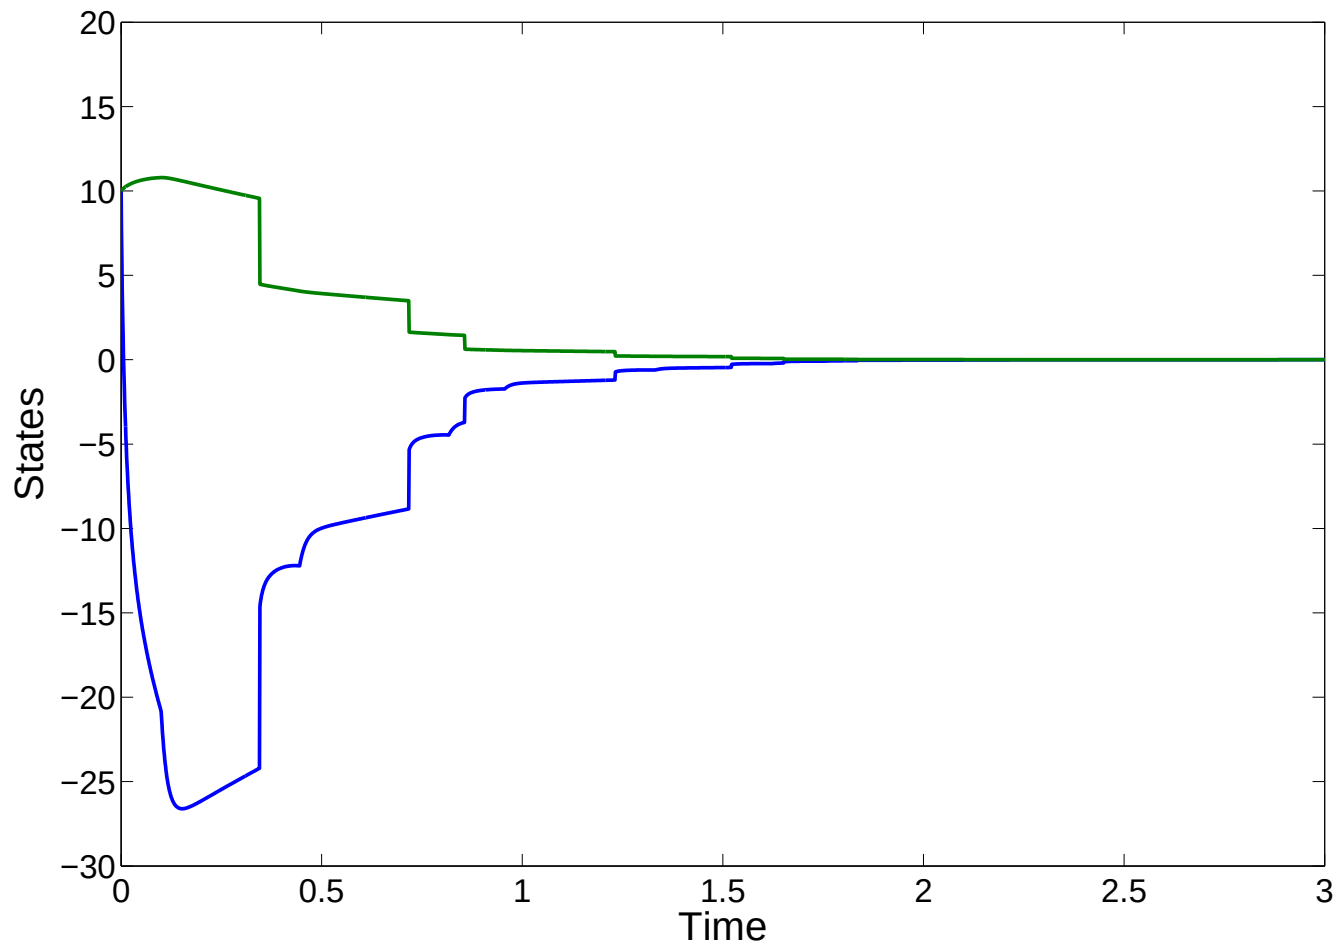

Fig. 1. State-trajectories of the closed-loop system (70).

Discrete-time approaches perform very well for stabilization, see e.g. [53], but are, until now, difficult to extend to uncertain systems due to the presence of exponential terms. The advantages of the proposed approach lie in the derivation of accurate convex robust stability and stabilization results together with a lower complexity than by using looped-functionals [10, 60].

4.1 Preliminaries

Let us consider here the continuous-time system

$$\dot{x}(t) = Ax(t) + Bu(t) \tag{72}$$

where $x \in \mathbb{R}^n$ and $u \in \mathbb{R}^m$ are the state of the system and the control input, respectively. The control input is assumed to be computed from a sampled-data state-feedback control law given by

$$u(t) = K_1 x(t_k) + K_2 u(t_{k-1}),\ t \in [t_k, t_{k+1}) \tag{73}$$

where $K_1 \in \mathbb{R}^{m\times n}$ and $K_2 \in \mathbb{R}^{m\times m}$ are the control gains to be determined. Note that the control-law, viewed as a discrete-map from x to u, is BIBO-stable if and only if K_2 is Schur. Above, the sequence of sampling instants $\{t_k\}_{k\in\mathbb{N}}$ is assumed to be strictly increasing and unbounded, i.e. $t_k \to \infty$, excluding therefore any Zeno behavior.

The sampled-data system (72)-(73) can be equivalently reformulated as the following impulsive system

$$\begin{aligned} \begin{bmatrix}\dot{x}(t)\\ \dot{z}(t)\end{bmatrix} &= \underbrace{\begin{bmatrix}A & B\\ 0 & 0\end{bmatrix}}_{\bar{A}} \begin{bmatrix}x(t)\\ z(t)\end{bmatrix},\ t \neq t_k\\ \begin{bmatrix}x(t)\\ z(t)\end{bmatrix} &= \underbrace{\begin{bmatrix}I & 0\\ K_1 & K_2\end{bmatrix}}_{\bar{J}} \begin{bmatrix}x^-(t)\\ z^-(t)\end{bmatrix},\ t = t_k \end{aligned} \tag{74}$$

where $z \in \mathbb{R}^m$ is an additional state containing the value of the held control input at any time, i.e. $z(t) = u(t_k)$, $t \in [t_k, t_{k+1})$. For convenience, we also decompose $\bar{J}$ as $\bar{J} = J_0 + B_0 K$ where

$$J_0 = \begin{bmatrix}I & 0\\ 0 & 0\end{bmatrix},\ B_0 = \begin{bmatrix}0\\ I\end{bmatrix} \text{ and } K = \begin{bmatrix}K_1 & K_2\end{bmatrix}. \tag{75}$$

4.2 Stabilization of periodic and aperiodic sampled-data systems

Stabilization of sampled-data systems being the most interesting problem, we will therefore focus on the stabilization of both periodic and aperiodic sampled-data systems. As in previous stabilization results, a suitable stabilizing controller gain K can be extracted from the solutions of a feasibility problem.

Theorem 4.1 (Periodic sampled-data systems) *The following statements are equivalent:*

(a) There exists a gain $K \in \mathbb{R}^{m\times(m+n)}$ such that the $\bar{T}$-periodic sampled-data system (72)-(73) *is asymptotically stable.*
(b) There exist matrices $P \in \mathbb{S}^{n+m}_{\succ 0}$ and $U \in \mathbb{R}^{m\times(n+m)}$ such that the LMI

$$\begin{bmatrix} -P & e^{A\bar{T}}\left(J_0P + B_0U\right) \\ \star & -P \end{bmatrix} \prec 0 \tag{76}$$

holds. Moreover, in such a case, a suitable stabilizing controller gain is retrieved using $K = UP^{-1}$.
(c) There exist a differentiable matrix function $R : [0, \bar{T}] \mapsto \mathbb{S}^{n+m}$, $S(0) \succ 0$, a matrix $Y \in \mathbb{R}^{m\times(n+m)}$ and a scalar $\varepsilon > 0$ such that the conditions

$$\bar{A}(\tau)S(\tau) + S(\tau)\bar{A}(\tau)^T + \dot{S}(\tau) \preceq 0 \tag{77}$$

and

$$\begin{bmatrix} -S(\bar{T}) + \varepsilon I & J_0S(0) + B_0Y \\ \star & -S(0) \end{bmatrix} \preceq 0 \tag{78}$$

hold for all $\tau \in [0, \bar{T}]$. Moreover, in such a case, a suitable stabilizing control gain is retrieved using $K = YS(0)^{-1}$.

Proof : The proof relies follows the same lines as the ones of the proofs of the stabilization results developed for impulsive systems. ♢

Remark 3 *Interestingly, it is also possible to impose $K_2 = 0$ without introducing any conservatism. Such a controller can indeed be designed by simply imposing the value 0 to $n \times m$ right-upper block of the matrix $S(0)$. The reason why this equality constraint is non-restrictive lies in the fact that $e^{\bar{A}\bar{T}}J$ is a block lower triangular matrix, and that it is well-known that stability of cascade systems (that are represented in terms of a block triangular matrix) can be exactly characterized by block diagonal Lyapunov functions.*

When the system is aperiodic, the following result can be obtained:

Theorem 4.2 (Aperiodic sampled-data systems) *The following statements are equivalent:*

(a) There exists a control law of the form (73) *that quadratically stabilizes the system* (72) *for any aperiodic sampling instant sequence $\{t_k\}$ such that $T_k \in [T_{min}, T_{max}]$.*
(b) There exist matrices $P \in \mathbb{S}^{n+m}_{\succ 0}$ and $U \in \mathbb{R}^{n\times(n+m)}$ such that the LMI

$$\begin{bmatrix} -P & e^{A\theta}\left(J_0P + B_0U\right) \\ \star & -P \end{bmatrix} \prec 0 \tag{79}$$

holds for all $\theta \in [T_{min}, T_{max}]$. Moreover, when this statement holds, a suitable stabilizing control gain can be obtained using the expression $K = UP^{-1}$.
(c) There exist a differentiable matrix function $R : [0, T_{max}] \mapsto \mathbb{S}^{n+m}$, $S(0) \succ 0$, a matrix $Y \in \mathbb{R}^{m\times(n+m)}$ and a scalar $\varepsilon > 0$ such that the conditions

$$\bar{A}(\tau)S(\tau) + S(\tau)\bar{A}(\tau)^T + \dot{S}(\tau) \preceq 0 \tag{80}$$

and

$$\begin{bmatrix} -S(\theta) + \varepsilon I & J_0 + B_0 Y \\ \star & -S(0) \end{bmatrix} \preceq 0 \tag{81}$$

hold for all $\tau \in [0, T_{max}]$ and all $\theta \in [T_{min}, T_{max}]$. Moreover, when this statement holds, a suitable stabilizing control gain can be obtained using the expression $K = YS(0)^{-1}$.

Example 6 *Let us consider the sampled-data system* (72) *with matrices*

$$A = \begin{bmatrix} 0 & 1 \\ 0 & -0.1 \end{bmatrix} \text{ and } B = \begin{bmatrix} 0 \\ 0.1 \end{bmatrix}. \tag{82}$$

Fixed control law: *Assume first that the control law is given as in [5] by $K_1 = \begin{bmatrix} -3.75 & -11.5 \end{bmatrix}$ and $K_2 = 0$. Results in the aperiodic case (T_{min} has been set to 0.001) are summarized in Table 5 together with some comparisons with previous ones based on functionals. The proposed approach yields results that are very close to the looped-functional approach developed in [60] together with a reduced computational complexity. The semidefinite program generated by SOSTOOLS involves, when R or S is of degree 4, 192 variables whereas the approach of [60] involves 1256 variables when using a polynomial of order 3. The execution time, on an Intel i7, 2.70 Ghz, 4GB of RAM, including pre- and post-processing is about 1 second whereas it is approximately of 4.46 seconds for the looped functional approach of [60].*

Control design: *Assume now that the control gains K_1 and K_2 have to be determined such that the closed-loop system is stable for any inter-sampling times in $[T_{min}, T_{max}]$. Applying then Theorem 4.2, we obtain the results gathered in Table 6 where, following Remark 3, $K_2 = 0$ has been imposed in the three last scenarios. We can see that the computed controllers involve numerical values with reasonable magnitude. The involved number of variables for degrees of R or S equal to 2 and 3 are 201 and 432, respectively (one variable less when $K_2 = 0$).*

Example 7 *Let us consider the sampled-data system* (72) *with matrices [60]*

$$A = \begin{bmatrix} -2 & 0 \\ 0 & -0.9 \end{bmatrix}, \ B = I_2, \ K_1 = \begin{bmatrix} -1 & 0 \\ -1 & -1 \end{bmatrix} \text{ and } K_2 = 0. \tag{83}$$

The results in the aperiodic case are summarized in Table 5. We can see that results using looped-functionals from [60] can be almost recovered when R or S is of degree 4, which corresponds to 338 variables. The looped-functional approach of [60] considers a matrix function of order 5, which corresponds to 3414 variables. The execution time, on an Intel i7, 2.70 Ghz, 4GB of RAM, including pre- and post-processing is about 1.14 seconds whereas it is approximately of 15.48 seconds when using looped-functionals [60].

Example 8 *Let us consider the sampled-data system* (72) *with matrices [6]*

$$A = \begin{bmatrix} 0 & 1 \\ -2 & 0.1 \end{bmatrix} \text{ and } B = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \tag{84}$$

borrowed from the time-delay system literature [51]. Assuming the control law $K_1 = \begin{bmatrix} 1 & 0 \end{bmatrix}$ and $K_2 = 0$, we get the results of Table 5. We obtain a result very close to the one of [60] using a matrix R or S of degree 6, which corresponds to 330 variables. The result of [60] considering a matrix polynomial of order 5 involves 3414 variables. The execution time, on an Intel i7, 2.70 Ghz, 4GB of RAM, including pre- and post-processing is about 1.12 seconds whereas it is approximately of 15.34 seconds for the looped functional approach of [60].

4.3 Robust stabilization of periodic and aperiodic sampled-data systems

Results on robust stabilization of sampled-data systems are straightforward extensions of Theorems 4.1 and 4.2; they are omitted for brevity. Only the following example is discussed:

Table 5
Estimates on the minimum and/or maximum sampling period for the systems of Examples 6, 7 and 8 - Aperiodic case.

	order of R or S	System (82)	System (83)	System (84)	
		T_{max}	T_{min}	T_{min}	T_{max}
Th. 2.1	2	1.0851	2.1496	0.4	0.8055
	4	1.7279	3.2480	0.4	1.6316
	6	1.7252	3.1933	0.4	1.8270
[27]	–	0.869	0.99	–	–
[48]	–	1.113	1.88	–	–
[26]	–	1.695	2.03	–	–
[43]	–	1.695	2.53	–	–
[59]	–	1.723	2.62	0.400	1.251
[60]	3	1.7294	3.218	0.4	1.820
	5	1.7294	3.269	0.4	1.828

Table 6
Control design results for system (82) using Theorem 4.2

T_{min}	T_{max}	K_1	K_2	order of R
0.001	6	$\begin{bmatrix} -0.2185 & -1.3276 \end{bmatrix}$	0.0022	2
	10	$\begin{bmatrix} -0.1145 & -0.8088 \end{bmatrix}$	-0.0024	2
	50	$\begin{bmatrix} -0.0202 & -0.1560 \end{bmatrix}$	-0.0030	2
0.001	10	$\begin{bmatrix} -0.0310 & -0.3222 \end{bmatrix}$	0	3
	20	$\begin{bmatrix} -0.0074 & -0.0811 \end{bmatrix}$	0	3
	50	$\begin{bmatrix} -0.0259 & -0.2726 \end{bmatrix}$	0	4

Table 7
Control design results for system (85) using Theorem 4.2

δ	T_{min}	T_{max}	K_1	K_2	order of R
5	0.001	10	$\begin{bmatrix} -0.0757 & -0.7306 \end{bmatrix}$	-0.0006	2
5		20	$\begin{bmatrix} -0.0411 & -0.3835 \end{bmatrix}$	-0.0022	2
20	0.001	10	$\begin{bmatrix} -0.0578 & -0.5560 \end{bmatrix}$	-0.0025	2
20		20	$\begin{bmatrix} -0.0339 & -0.3121 \end{bmatrix}$	-0.0019	2

Example 9 *Let us consider the uncertain sampled-data system* (72) *with matrices*

$$A \in \mathcal{A} = \mathbf{co}\left\{\begin{bmatrix} 0 & 1 \\ 0 & -0.1 \end{bmatrix}, \delta\begin{bmatrix} 0 & 1 \\ 0 & -0.1 \end{bmatrix}\right\} \text{ and } B = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \tag{85}$$

where δ is a positive parameter. We then apply Theorem 4.2 to design robust state-feedback controllers for different values for $\delta > 0$ and $T_{max} > 0$. The results are summarized in Table 7 where we can see that the system can be stabilized for a quite wide range of values for the parameter δ and the maximal sampling period T_{max}. For a polynomial or order 2, the semidefinite program involve 237 variables. The execution time including pre- and post-processing is about 2.23 seconds on an Intel i7, 2.70 Ghz, 4GB of RAM.

5 Conclusion

Discontinuous Lyapunov functions have been shown to be a powerful tool for analyzing stability of linear impulsive systems. The flexibility of the framework allows for easy extensions to aperiodic systems and uncertain systems together with a reduced computational complexity with respect to looped-functional based approaches. The presence of a unique decision matrix permits the derivation of convex synthesis conditions without any simplifying nor restrictive assumptions. This method has been shown to provide a solution to the open problem of deriving convex conditions for robust stabilization of aperiodic uncertain linear impulsive with minimum, maximum and ranged dwell-times.

As a byproduct, the approach can also be applied to sampled-data systems by exploiting the generic representability of sampled-data systems as impulsive systems. By transitivity, the approach has been shown to provide a solution to the open problem of deriving convex conditions for robust stabilization of aperiodic uncertain time-varying sampled-data systems.

Addressing the cases of homogeneous polynomial Lyapunov functions [20, 21] and nonlinear impulsive systems are possible generalizations of the approach. Notably, homogeneous Lyapunov function can be used to vanish the conservatism of the approach for linear systems, following to [68, 21]. There is also hope to be able to apply these results to other classes of systems or more complex ones, e.g. with delays. Complexity reduction is also an important and interesting research direction.

References

[1] L. I. Allerhand and U. Shaked. Robust state-dependent switching of linear systems with dwell-time. *IEEE Transactions on Automatic Control*, 58(4):994–1001, 2013.

[2] D. Antunes, J. P. Hespanha, and C. Silvestre. Control of impulsive renewal systems: Application to direct design in networked control. In *48th IEEE Conference on Decision and Control*, pages 6882–6887, Shanghai, China, 2009.

[3] D. D. Bainov and P. S. Simeonov. *Systems with impulse effects: Stability, theory and applications.* Academy Press, 1989.

[4] A. Baños, J. Carrasco, and A. Barreiro. Reset times-dependent stability of reset control systems. *IEEE Transactions on Automatic Control*, 56(1):217–223, 2011.

[5] M. S. Branicky, S. M. Phillips, and W. Zhang. Stability of networked control systems: explicit analysis of delay. In *American Control Conference*, pages 2352–2357, Chicago, Illinois, USA, 2000.

[6] C. Briat and U. T. Jönsson. Dynamic equations on time-scale: application to stability analysis and stabilization of aperiodic sampled-data systems. In *18th IFAC World Congress*, pages 11374–11379, Milano, Italy, 2011.

[7] C. Briat and A. Seuret. Stability criteria for asynchronous sampled-data systems - a fragmentation approach. In *18th IFAC World Congress*, pages 1313–1318, Milano, Italy, 2011.

[8] C. Briat and A. Seuret. A looped-functional approach for robust stability analysis of linear impulsive systems. *Systems & Control Letters*, 61:980–988, 2012.

[9] C. Briat and A. Seuret. Robust stability of impulsive systems: A functional-based approach. In *4th IFAC Conference on analysis and design of hybrid systems*, pages 412–417, Eindovhen, the Netherlands, 2012.

[10] C. Briat and A. Seuret. Convex dwell-time characterizations for uncertain linear impulsive systems. *IEEE Transactions on Automatic Control*, 57(12):3241–3246, 2012.

[11] C. Briat and A. Seuret. Affine minimal and mode-dependent dwell-time characterization for uncertain switched linear systems. *to appear in IEEE Transactions on Automatic Control (May 2013)*, 2013.

[12] C. Briat and E. I. Verriest. A new delay-SIR model for pulse vaccination. *Biomedical signal processing and control*, 4(4):272–277, 2009.

[13] C. Briat, E. A. Yavuz, and G. Karlsson. A conservation-law-based modular fluid-flow model for network congestion modeling. In *31st IEEE International Conference on Computer Communications (INFOCOM)*, pages 2050–2058, Orlando, Florida, USA, 2012.

[14] B. Brogliato, editor. *Impacts in Mechanical Systems: Analysis and Modelling.* Springer-Verlag, 2000.

[15] C. Cai, A. R. Teel, and R. Goebel. Converse Lyapunov theorems and robust asymptotic stability for hybrid systems. In *American Control Conference*, pages 12–17, Portland, Oregon, USA, 2005.

[16] C. Cai, A. R. Teel, and R. Goebel. Smooth Lyapunov functions for hybrid systems Part ii: (pre)asymptotically stable compact sets. *IEEE Transactions on Automatic Control*, 53(3):734–748, 2008.

[17] T. Chen and B. Francis. *Optimal Sampled-Data Control Systems.* Berlin: Springer, 1995.

[18] W.-H. Chen and W. W. Zheng. Input-to-state stability for networked control systems via an improved impulsive system approach. *Automatica*, 47:789–796, 2011.

[19] G. Chesi. LMI techniques for optimization over polynomials in control: A survey. *IEEE Transactions on Automatic Control*, 55(11):2500–2510, 2010.

[20] G. Chesi, A. Garulli, A. Tesi, and A. Vicino. *Homogeneous polynomial forms for robustness analysis of uncertain systems.* Lecture Notes in Control and Information Sciences. Springer-Verlag, Berlin Heidelberg, 2009.

[21] G. Chesi, P. Colaneri, J. C. Geromel, R. Middleton, and R. Shorten. A nonconservative lmi condition for stability of switched systems with guaranteed dwell-time. *IEEE Transactions on Automatic Control*, 57(5): 1297–1302, 2012.

[22] D. Dai, T. Hu, A. R. Teel, and L. Zaccarian. Output feedback synthesis for sampled-data system with input saturation. In *American Control Conference*, pages 1797–1802, Baltimore, Maryland, USA, 2010.

[23] S. Dashkovskiy and A. Mironchenko. Input-to-state stability of nonlinear impulsive systems. *ArXiv e-prints*, 2012.

[24] S. Dashkovskiy, M. Kosmykov, A. Mironchenko, and L. Naujok. Stability of interconnected impulsive systems with and without time-delays, using Lyapunov methods. *Nonlinear Analysis: Hybrid systems*, 6:899–915, 2012.

[25] G. E. Dullerud and S. Lall. Asynchronous hybrid systems with jumps – analysis and synthesis methods. *Systems & Control Letters*, 37(2):61–69, 1999.

[26] E. Fridman. A refined input delay approach to sampled-data control. *Automatica*, 46(2):421–427, 2010.

[27] E. Fridman, A. Seuret, and J. P. Richard. Robust sampled-data stabilization of linear systems: An input delay approach. *Automatica*, 40:1441–1446, 2004.

[28] H. Fujioka. A discrete-time approach to stability analysis of systems with aperiodic sample-and-hold devices. *IEEE Transactions on Automatic Control*, 54(10):2440–2445, 2009.

[29] H. Fujioka. Stability analysis of systems with aperiodic sample-and-hold devices. *Automatica*, 45:771–775, 2009.

[30] P. M. Gahinet, A. J. Laub, C. S. Kenney, and G. A. Hewer. Sensitivity of the stable discrete-time Lyapunov equation. *IEEE Transactions on Automatic Control*, 35(11):1209–1217, 1990.

[31] J. C. Geromel and P. Colaneri. Stability and stabilization of continuous-time switched linear systems. *SIAM Journal on Control and Optimization*, 45(5):1915–1930, 2006.

[32] R. Goebel, R. G. Sanfelice, and A. R. Teel. Hybrid dynamical systems. *IEEE Control Systems Magazine*, 29(2): 28–93, 2009.

[33] K. Gu. A further refinement of discretized Lyapunov-Krasovskii functional method for the stability of time-delay systems. *International Journal of Control*, 74(10):967–976, 2001.

[34] J. P. Hespanha and A. S. Morse. Stability of switched systems with average dwell-time. In *38th Conference on Decision and Control*, pages 2655–2660, Phoenix, Arizona, USA, 1999.

[35] J. P. Hespanha, P. Naghshtabrizi, and Y. Xu. A survey of recent results in networked control systems. *Proceedings of the IEEE*, 95(1):138–162, 2007.

[36] J. P. Hespanha, D. Liberzon, and A. R. Teel. Lyapunov conditions for input-to-state stability of impulsive systems. *Automatica*, 44(11):2735–2744, 2008.

[37] L. Hetel, J. Daafouz, and C. Iung. Analysis and control of LTI and switched systems in digital loops via an event-based modelling. *International Journal of Control*, 81:1125–1138, 2008.

[38] T. Iwasaki and S. Hara. Well-posedness of feedback systems: insight into exact robustness analysis and approximate computations. *IEEE Transactions on Automatic Control*, 43:619–630, 1998.

[39] C.-Y. Kao and H. Fujioka. On stability of systems with aperiodic sampling devices (to appear). *IEEE Transactions on Automatic Control*, 2013.

[40] P. P. Khargonekar, I. A. Petersen, and K. Zhou. Robust stabilization of uncertain linear systems: Quadratic satbilizability and $\mathcal{H}_\infty$ control theory. *Journal of Mathematical Analysis and Applications*, 254:410–432, 2001.

[41] Q. Lin, R. C. Loxton, K. L. Teo, and Y. H. Wu. A new computational method for optimizing nonlinear impulsive systems. *Dynamics of Continuous, Discrete and Impulsive Systems Series B: Applications & Algorithms*, 18: 59–76, 2011.

[42] K. Liu and E. Fridman. Wirtinger's inequality and Lyapunov-based sampled-data stabilization. *Automatica*, 48(1):102–108, 2012.

[43] K. Liu, V. Suplin, and E. Fridman. Stability of linear systems with general sawtooth delay. *IMA J. of Math. Control and Information*, 27(4):419–436, 2010.

[44] R. C. Loxton, K. L. Teo, V. Rehbock, and W. K. Ling. Optimal switching instants for a switched-capacitor DC/DC power converter. *Automatica*, 45(4):973–980, 2009.

[45] A. N. Michel, L. Hou, and D. Liu. *Stability of dynamical systems - Continuous, discontinuous and discrete systems.* Birkhäuser, 2008.

[46] L. Mirkin. Some remarks on the use of time-varying delay to model sample-and-hold circuits. *IEEE Transactions on Automatic Control*, 52(6):1109–1112, 2007.

[47] A. S. Morse. Supervisory control of families of linear set-point controllers - part 1: Exact matching. *IEEE Transactions on Automatic Control*, 41(10):1413–1431, 1996.

[48] P. Naghshtabrizi, J. P. Hespanha, and A. R. Teel. Exponential stability of impulsive systems with application to uncertain sampled-data systems. *Systems & Control Letters*, 57:378–385, 2008.

[49] D. Nešić, L. Zaccarian, and A. R. Teel. Stability properties of reset systems. *Automatica*, 44(8):2019–2026,

2008.

[50] D. Nešić, A. R. Teel, and L. Zaccarian. Stability and performance of SISO control systems with first-order reset elements. *IEEE Transactions on Automatic Control*, 56(11):2567–2582, 2011.

[51] S. I. Niculescu, K. Gu, and C. T. Abdallah. Some remarks on the delay stabilizing effect in siso systems. In *48th IEEE American Control Conference*, pages 2670–2675, Denver, CO, USA, 2003.

[52] Y. Oishi and H. Fujioka. Stability and stabilization of aperiodic sampled-data control systems: an approach using robust linear matrix inequalities. In *48th Conference on Decision and Control*, pages 8142–8147, Shanghai, China, 2009.

[53] Y. Oishi and H. Fujioka. Stability and stabilization of aperiodic sampled-data control systems using robust linear matrix inequalities. *Automatica*, 46:1327–1333, 2010.

[54] P. Parrilo. *Structured Semidefinite Programs and Semialgebraic Geometry Methods in Robustness and Optimization.* PhD thesis, California Institute of Technology, Pasadena, California, 2000.

[55] S. Prajna, A. Papachristodoulou, P. Seiler, and P. A. Parrilo. *SOSTOOLS: Sum of squares optimization toolbox for MATLAB*, 2004.

[56] M. Putinar. Positive polynomials on compact semi-algebraic sets. *Indiana Univ. Math. J.*, 42(3):969–984, 1993.

[57] C. W. Scherer. Robust mixed control and LPV control with full-block scalings. In L El Ghaoui and S.-I. Niculescu, editors, *Advances in LMI Methods in Control, SIAM*, pages 187–208. SIAM, 2000.

[58] A. Seuret. Stability analysis for sampled-data systems with a time-varying period. In *48th Conference on Decision and Control*, pages 8130–8135, Shanghai, China, 2009.

[59] A. Seuret. A novel stability analysis of linear systems under asynchronous samplings. *Automatica*, 48(1): 177–182, 2012.

[60] A. Seuret and M. M. Peet. Stability analysis of sampled-data systems using sum of squares (to appear). *IEEE Transactions on Automatic Control*, Available online, 2013.

[61] N. Sivashankar and P. P. Khargonekar. Characterization of the $\mathcal{L}_2$-induced norm for linear systems with jumps with applications to sampled-data systems. *SIAM Journal on Control and Optimization*, 32(4):1128–1150, 1994.

[62] L. Stone, B. Shulgin, and Z. Agur. Theoretical examination of the pulse vaccination policy in the SIR epidemic model. *Mathematical and computer modelling*, 31(4-5):201–215, 2000.

[63] J. F. Sturm. Using SEDUMI 1.02, a Matlab Toolbox for Optimization Over Symmetric Cones. *Optimization Methods and Software*, 11(12):625–653, 2001.

[64] Y. S. Suh. Stability and stabilization of nonuniform sampling systems. *Automatica*, 44:3222–3226, 2008.

[65] W. Sun, K. M. Nagpal, and P. P. Khargonekar. H_∞ control and filtering with sampled measurements. In *American Control Conference, 1991*, pages 1652–1657, 1991.

[66] A. R. Teel, D. Nešić, and P. V. Kokotović. A note on input-to-state stability of sampled-data nonlinear systems. In *37th IEEE Conference on Decision and Control*, pages 2473–2478, 1998.

[67] E. I. Verriest and P. Pepe. Time optimal and optimal impulsive control for coupled differential difference point delay systems with an application in forestry. In J. J. Loiseau, W. Michiels, S. I. Niculescu, and R. Sipahi, editors, *Topics in Time Delay Systems*, volume 388 of *Lecture Notes in Control and Information Sciences*, pages 255–265. Springer Berlin Heidelberg, 2009.

[68] F. Wirth. A converse Lyapunov theorem for linear parameter-varying and linear switching systems. *SIAM Journal on Control and Optimization*, 44(1):210–239, 2005.

[69] T. Yang. *Impulsive control theory.* Springer-Verlag, 2001.

[70] R. Yu and P. Leung. Optimal partial harvesting schedule for aquaculture operations. *Automatica*, 45(4):973–980, 2009.

[71] S. Zampieri. A survey of recent results in Networked Control Systems. In *17th IFAC World Congress*, pages 2886–2894, Seoul, South Korea, 2008.

[72] W. Zhang, M. S. Branicky, and S. M. Phillips. Stability of Networked Control Systems. *IEEE Control Systems Magazine*, 21(1):84–99, 2001.

This figure "states_impulsive.png" is available in "png" format from:

http://arxiv.org/ps/1304.1998v1